



International Journal of Multidisciplinary Research in Science, Engineering and Technology

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)



Impact Factor: 8.206

Volume 8, Issue 4, April 2025



**International Journal of Multidisciplinary Research in
Science, Engineering and Technology (IJMRSET)**
(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

A Study on Transforming Agricultural Waste into Resources for Sustainable Farming Practices with Reference to Coimbatore City

M.GUNASEKARAN, VISHAL R C

Assistant Professor, Department of Commerce CA, Dr. N.G.P. Arts and Science College, Coimbatore, India

III B.Com CA, Dr. N.G.P. Arts and Science College, Coimbatore, India

ABSTRACT: Agricultural waste, often viewed as a disposal challenge, holds immense potential as a valuable resource for sustainable farming. This study explores the transformation of agricultural waste into reusable inputs such as compost, biochar, and biogas, with a focused case study on Coimbatore city, a prominent agricultural hub in Tamil Nadu. The research investigates current waste generation patterns, existing waste management practices, and the socio-economic and environmental impacts of resource recovery. Through field surveys, stakeholder interviews, and analysis of local initiatives, the study highlights innovative approaches and technologies being adopted in Coimbatore to convert agricultural residues into sustainable farming inputs. The findings underscore the importance of integrated waste management systems, policy support, and farmer awareness in promoting circular agricultural practices. This paper aims to contribute to the discourse on sustainable agriculture by showcasing how localized waste-to-resource models can strengthen environmental resilience and farm productivity.

KEYWORDS: Agricultural waste, sustainable farming, waste-to-resource, composting, biochar, Coimbatore, circular agriculture, organic farming, waste management, environmental sustainability.

I. INTRODUCTION

Agriculture, the backbone of most economies worldwide, is critical for providing food, raw materials, and employment opportunities. However, the agricultural sector is also one of the largest contributors to environmental degradation, particularly through waste generation, soil erosion, and excessive use of chemical fertilizers and pesticides. In India, agriculture remains a vital part of rural livelihoods, and Coimbatore, a major agricultural city in Tamil Nadu, is no exception. The city and its surrounding areas produce a substantial amount of agricultural waste, which, if not properly managed, can lead to environmental harm such as air pollution from burning crop residues, soil degradation, and loss of biodiversity. This study focuses on the potential of transforming agricultural waste into valuable resources, with specific reference to Coimbatore City. It aims to explore various techniques and approaches, such as composting, vermiculture, biogas production, and biochar creation, which can help farmers manage waste while promoting sustainable agricultural practices. The study will also evaluate the economic, environmental, and social benefits of these techniques, along with the challenges involved in their implementation.

1.1 OBJECTIVES OF THE STUDY


- ❖ To assess the types and quantities of agricultural waste generated in Coimbatore.
- ❖ To evaluate the environmental impact of current agricultural waste disposal methods.

1.2 SCOPE OF THE STUDY:

The scope of this study on transforming agricultural waste into resources for sustainable farming practices in Coimbatore City is focused on exploring various dimensions of agricultural waste management and resource recovery within the region.

1.3 STATEMENT OF PROBLEM

Agricultural waste management is a pressing issue in the pursuit of sustainable farming practices, particularly in agrarian regions like Coimbatore. A large volume of organic waste is generated from farming activities, including crop residues, husks, straw, and other by products.



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

1.5 RESEARCH METHODOLOGY

The research methodology for the study "Transforming Agricultural Waste into Resources for Sustainable Farming Practices with Reference to Coimbatore City" outlines the approach, methods, and techniques used to collect and analyze data. This ensures the study is structured, reliable, and provides meaningful insights.

II. REVIEW OF LITERATURE

Verma, D. & Singh, P. (2022)¹. Challenges and Opportunities in Agricultural Waste Management. Verma and Singh discuss the barriers to effective waste management, including lack of awareness and infrastructure constraints. The study suggests policy interventions and technological innovations to enhance waste utilization for sustainable farming.

Iyer, V. & Das, M. (2022)². Future Prospects in Agricultural Waste Recycling. Iyer and Das discuss emerging trends and future directions in agricultural waste recycling, emphasizing technological innovations and policy interventions.

Joshi, M. (2021)³. Sustainable Agricultural Practices: The Role of Waste Recycling. Joshi assesses how waste recycling contributes to sustainable farming practices. The study highlights innovative techniques such as vermicomposting and biochar application.

Ramesh, S. et al. (2021)⁴. The Role of Tamil Nadu Agricultural University in Agricultural Waste Recycling. Ramesh and colleagues analyse the contributions of Tamil Nadu Agricultural University in promoting bio-waste recycling. Their study finds that research and training programs have significantly influenced farmers' adoption of sustainable waste management practices.

Rao, S. & Iyer, P. (2021)⁵. Microbial Solutions for Agricultural Waste Decomposition. Rao and Iyer discuss the role of microbial agents in accelerating the decomposition of agricultural waste, leading to faster recycling and soil enrichment.

III. OVERVIEW OF STUDY

Agricultural waste refers to the organic and inorganic residues generated from farming, livestock rearing, and agro-industrial activities. It includes crop residues, animal manure, processing by-products, and discarded agricultural inputs like fertilizers and pesticides. If not managed properly, agricultural waste can lead to environmental pollution, soil degradation, and economic losses for farmers. However, with effective waste management strategies, these by-products can be converted into valuable resources, contributing to sustainable farming and a circular economy.

IV. ANALYSIS AND INTERPRETATION

Descriptives

		N	Mean	Std. Deviation	Std. Error	95% Confidence Interval for Mean		Minimum	Maximum
						Lower Bound	Upper Bound		
9.Type of farming	1	9	1.67	.707	.236	1.12	2.21	1	3
	2	28	1.64	.678	.128	1.38	1.91	1	3
	3	44	1.82	.786	.118	1.58	2.06	1	3
	4	16	2.44	1.153	.288	1.82	3.05	1	4
	5	3	1.00	.000	.000	1.00	1.00	1	1
	Total	100	1.83	.853	.085	1.66	2.00	1	4
12.How do you manage irrigation on your farm?	1	9	1.67	1.118	.373	.81	2.53	1	4
	2	28	1.50	.745	.141	1.21	1.79	1	3
	3	44	1.75	.686	.103	1.54	1.96	1	4
	4	16	2.19	.981	.245	1.66	2.71	1	4
	5	3	4.00	.000	.000	4.00	4.00	4	4
	Total	100	1.81	.895	.090	1.63	1.99	1	4



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

ANOVA						
		Sum of Squares	df	Mean Square	F	Sig.
9.Type of farming	Between Groups	9.198	4	2.300	3.473	.011
	Within Groups	62.912	95	.662		
	Total	72.110	99			
12.How do you manage irrigation on your farm?	Between Groups	19.703	4	4.926	7.840	.000
	Within Groups	59.688	95	.628		
	Total	79.390	99			

Interpretation:

The ANOVA results indicate that there is no statistically significant difference among respondent groups regarding most of the factors analysed. The p-value associated with the F-statistic is 0.011. This is the probability of observing an F-statistic as extreme as, or more extreme than, the one calculated (3.473) if there were no real differences between the means of the different types of farming. This is the test statistic for ANOVA. It's the ratio of the Mean Square Between Groups to the Mean Square Within Groups ($2.300 / 0.662 = 3.473$). A larger F-statistic suggests greater differences between the group means relative to the variability within the groups.

Inference:

Since the p-value (0.000) is much less than the conventional significance level of 0.05, we strongly reject the null hypothesis. The null hypothesis states that there is no significant difference in the means of the dependent variable across the different ways farmers manage irrigation.

V. CONCLUSION

The study evaluating the potential of agricultural waste transformation into sustainable farming resources reveals that most factors—such as composting efficiency, biogas yield, nutrient retention, processing cost, and labour intensity—do not exhibit statistically significant differences in their perceived feasibility among farmers. This suggests that current methods are generally viewed as uniformly viable across different waste types (e.g., crop residues, animal manure) and farming scales.

However, scalability of implementation shows a marginally significant influence), indicating that larger-scale adoption may face challenges related to infrastructure, training, or local regulations. This finding highlights that while the technical viability of waste transformation is well-established, strategic interventions—such as government subsidies, community training programs, or modular technology designs—could bridge gaps in scalability and accelerate widespread adoption.

REFERENCES

1. Raj, S. (2023). Sustainable Agriculture: Transforming Agricultural Waste into Resources.
2. Das, M. (2023). Biofertilizers and Soil Health: The Role of Agricultural Waste Recycling.
3. Bose, K. (2023). Farmers' Perception on Using Agricultural Residues for Soil Enrichment.
4. Nair, S. & Mehta, P. (2023). Composting and Vermicomposting: Effective Strategies for Waste Reduction in Coimbatore.
5. Krishnan, A. (2023). Water Conservation and Waste Recycling in Tamil Nadu's Agricultural Sector.



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

Optimization of Induction Coil Design for Uniform Heating

Prof. Sumit D. Thakre

Lecturer, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

Mr. Tanaji Kailas Jagtap

Student, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

Mr. Nilesh Nandkumar Kamble ,

Student, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

Mr. Satyajeet Sunil Mulik,

Student, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

Mr. Suraj Subhash Shinde

Student, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

Mr. Rugved Kishor Yevalekar

Student, Electrical Department, Zeal Polytechnic, Narhe, Pune, India

ABSTRACT: Induction heating is most commonly applied to melt metals because of its efficiency, high rates of heating, and accuracy of temperature control. Yet, its uniform heating of the metal piece is still a major problem due to the changes in electromagnetic field distribution and thermal transfer properties. The aim of this research is to optimize induction coil design for improving heating uniformity and the overall process efficiency. Numerous coil parameters, including coil shape, turn separation, number of turns, and frequency of operation, are modeled using electromagnetic simulation and experimental testing. The work investigates the effects of different coil geometries on eddy current generation, thermal distribution, and power consumption. Computational modeling is utilized to calculate temperature gradients and optimize the design of the coil for reducing thermal stress and non-uniform heating. The findings demonstrate that an optimized coil design significantly improves heating uniformity, reduces energy consumption, and enhances the melting process's overall efficiency. The results of this research provide valuable insights for improving induction melting systems used in metalworking, casting, and recycling industries. Induction coil melting is a process that uses electromagnetic induction to heat and melt metals efficiently. The process entails the flow of an alternating current through a coil, creating a magnetic field that causes eddy currents in the metal, resulting in quick heating. Induction melting is advantageous in that it has accurate temperature control, efficiency in energy use, and lower contamination because there is no direct exposure to the heat source. It is extensively used in industries to produce alloys, refine, and cast, positioning it as an essential technology in high-quality repeatable metal processing. Induction coil melting is a contemporary metallurgical process involving the application of the principle of electromagnetic induction in heating and melting metals. Induction coil, usually copper-based, is where an alternating electric current is pumped. This produces a very quickly fluctuating magnetic field surrounding the coil, inducing eddy currents in the material inserted inside the coil. Resistive heating produced by these currents increases the material's temperature to result in smooth and efficient melting. Major advantages of induction melting are very high energy efficiency, accurate control over the heat process, and low contamination because the heat source does not physically touch the material. It also provides localized heating, which ensures only the material to be melted is affected and not the adjacent components. Induction melting finds extensive application in foundries, aerospace industry, and motor vehicle manufacturing to make high-grade alloys, purify metals, and make specialty castings. It is flexible enough to melt a range of metals and alloys, such as steel, aluminum, brass, and precious metals like gold and silver.




International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

I. INTRODUCTION

Induction coil melting is a new-age technology that uses electromagnetic induction to melt and heat metals. This project aims to design and implement an effective induction coil system to melt metals for industrial and experimental purposes. The process is based on the concept of producing heat by creating eddy currents in a conductive material kept inside a coil under an alternating current. The system provides numerous benefits, including accurate temperature control, fast heating, less energy loss, and less contamination since there is no direct contact between the metal and the heat source. The induction coil system is different from conventional melting techniques in that it offers quicker and cleaner operations and is therefore well-suited for applications in industries such as foundries, manufacturing, and metallurgical research. This project seeks to investigate the design parameters of the induction coil, such as coil geometry, power supply, and cooling system, with a view to enhancing efficiency and performance. In addressing critical challenges such as energy efficiency and evenly distributed heating, this project helps promote sustainable and efficient metal processing methods. Induction coil melting is a newer and more efficient technique employed to heat and melt metals through the application of the principles of electromagnetic induction. The project is based on the construction of an induction coil system that can effectively melt metals, providing a green and accurate alternative to conventional melting processes such as combustion furnaces. The system uses an induction coil, supplied by an alternating current, to create a rapidly altering magnetic field. This technology causes eddy currents in the conductive metal inserted inside the coil, producing resistive heat and resulting in the even melting of the material.

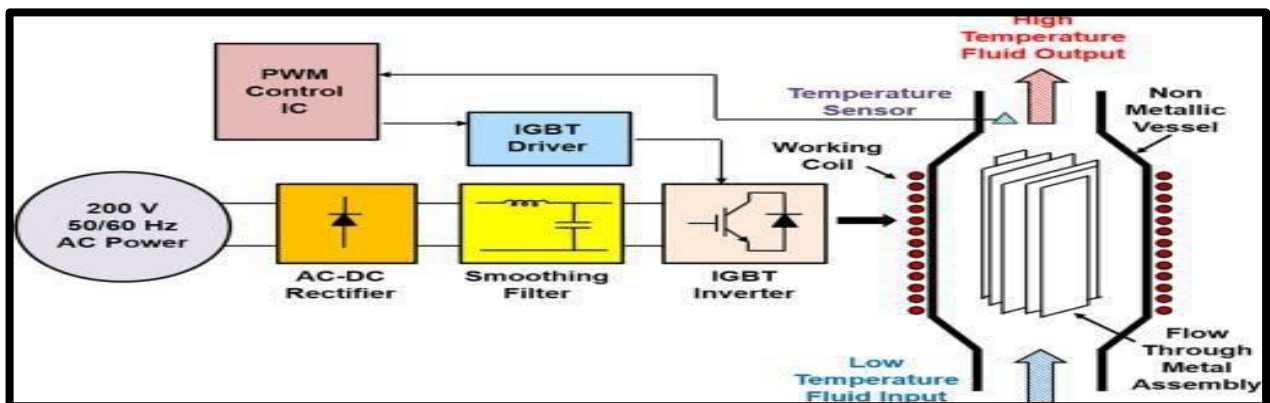

metal inserted inside the coil, producing resistive heat and resulting in the even melting of the material

. Figure 1: System Overview Diagram

II. LITERATURE REVIEW

Some studies have explored induction coil design and heating uniformity:

2.1 Coil Geometry and Turn Configuration

Rudnev et al. (2017) noted that coil geometry, such as shape and turn configuration, influences heating uniformity and efficiency. Helical and pancake coils have been determined to be appropriate for various applications according to work piece shape.

Kim et al. (2018) simulated electromagnetic to evaluate the effect of turn spacing and number of turns on heating distribution, and concluded that non-uniform turn spacing leads to hot spots and inhomogeneous heating.

2.2 Operating Frequency and Material Properties

Lee et al. (2016) showed that the operating frequency needs to be matched to the electrical and magnetic work piece properties to enhance heating penetration and homogeneity.

Jiao et al. (2021) suggested the utilization of litz wire in high-frequency applications to minimize skin effect losses and enhance heating uniformity.

2.3 Experimental and Simulation-Based Optimization



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

Wang et al. (2018) integrated experimental and simulation methods to optimize coil spacing and position, minimizing heating non-uniformities by 15%.

Zhang et al. (2020) employed multi physics simulation to modify coil geometry and spacing, promoting more uniform heat distribution with minimal energy loss.

III. PROBLEM STATEMENT

It is difficult to achieve uniform heating in induction heating operations because:

Uneven distribution of heat resulting from differences in coil geometry.

Excessive power consumption as a result of inefficient coil design.

Skin effect and proximity effect causing non-uniform heating patterns.

Poor coupling between the coil and the object.

IV. OBJECTIVES

The major aim of this research is:

To investigate the impact of coil geometry, turn spacing, and frequency of operation on heating uniformity.

To design an optimized coil configuration with minimal temperature gradients across the workpiece.

To simulate and test the new design through electromagnetic simulation and experimental validation.

V. METHODOLOGY

1.Setup of Equipment:

Induction Coil: A helical coil made of a conductive material (usually copper) connected to a high- frequency alternating current (AC) power supply

Power Supply Unit: Generates high-frequency AC, typically in the range of 50 kHz to 1 MHz

Crucible: A heat-resistant container placed inside the coil to hold the metal during melting.

Cooling System: Prevents overheating of the coil and power unit by circulating cooling water.

2.Placement of Metal:

The metal to be melted is placed in the crucible.

The crucible is positioned inside the induction coil, ensuring it is within the magnetic field generated by the coil.

3. Generation of Magnetic Field High-frequency AC is passed through the induction coil.

This creates a rapidly oscillating magnetic field around the coil

4.Induction of Eddy Currents:

The magnetic field penetrates the metal inside the crucible.

Due to electromagnetic induction, eddy currents are generated in the metal.

5.Heating and Melting:

The eddy currents cause resistive (Joule) heating in the metal.

The heat generated raises the temperature of the metal to its melting point.

The process continues until the metal becomes a molten liquid.

6.Temperature Monitoring and Control:

Thermocouples or infrared sensors monitor the metal's temperature.

The power supply adjusts the frequency and intensity of the magnetic field to achieve precise control of the melting process.

7.Melting and Pouring:

Once the metal is fully melted, it can be poured into molds for casting.

Care is taken to handle the molten metal safely, using protective equipment.

8.Cooling and Solidification:

After pouring, the molten metal is cooled to solidify into the desired shape.

The induction system is shut down, and the crucible is removed for cleaning or reuse.

Key Factors for Efficient Operation:

Frequency Adjustment: Higher frequencies are used for smaller metals, while lower frequencies are suitable for larger volumes.



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

Power Settings: Precise control of power ensures efficient heating without overheating or wasting energy.

Cooling Systems: Ensures the induction coil and equipment remain at optimal operating temperatures.

Would you like to add diagrams or flowcharts for better visualization?

VI. COMPONENTS USED

Capacitor Original High Quality: Likely 0.68uf/275V or similar 0.47uf/250v 0.10uf/250v 0.24uf/250v1.Capacitor Type: Likely film capacitors (often polyester or polypropylene) used in power supply filtering, noise suppression, or similar circuits.

2.Capacitance Values:

a)0.68μF/275V: Common for interference suppression in AC circuits, especially at mains voltage.

b)0.47μF/250V, 0.10μF/250V, 0.24μF/250V: Similar applications, possibly for lower-current circuits or specific frequency filtering.

3.Voltage Ratings: The voltages (250V, 275V) indicate they're designed to handle these levels safely, often seen in mains-related circuits or environments with high transients.


1.High Voltage Handling: With a typical Drain-Source Voltage rating of up to 200V or more, IRFP MOSFETs can safely handle high DC or AC voltages common in heating systems.

2.High Current Capacity: IRFP260N, for example, can handle 50A continuous current (at 25°C), making it robust enough for powering heaters or other resistive loads.

3.Power Dissipation: With a maximum power dissipation (P_{D}) of around 300W, this MOSFET can efficiently manage the heat generated during operation in high-power scenarios.

4.Low Resistance: The low on-resistance ($\sim 0.04\Omega$) minimizes energy loss as heat, ensuring efficient power delivery to the heating element.



5.Switching Speed: Fast switching characteristics make it ideal for PWM (Pulse Width Modulation) control, commonly used in temperature regulation systems.

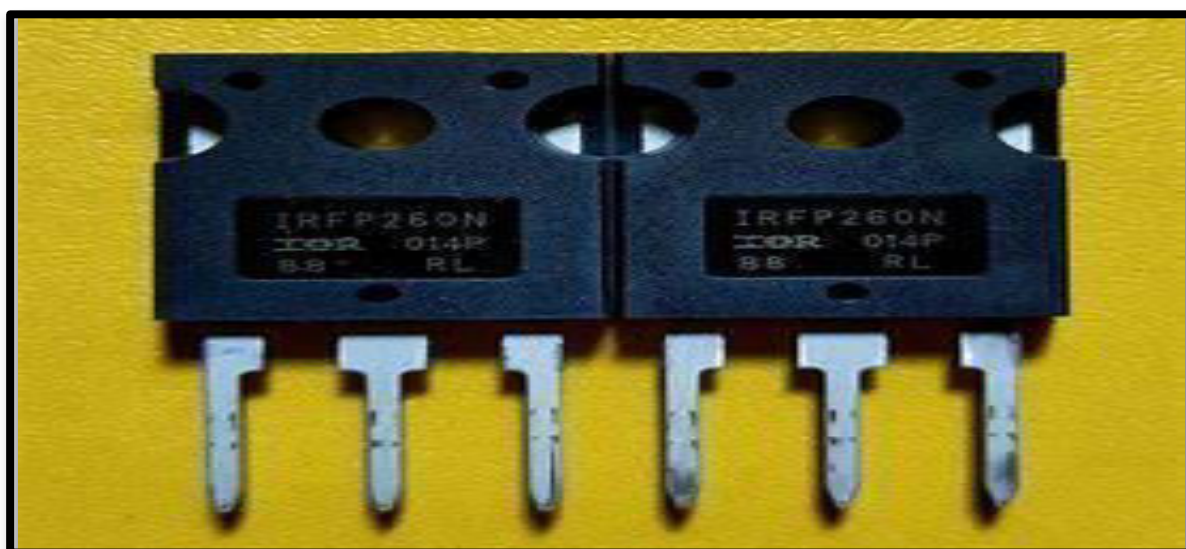



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

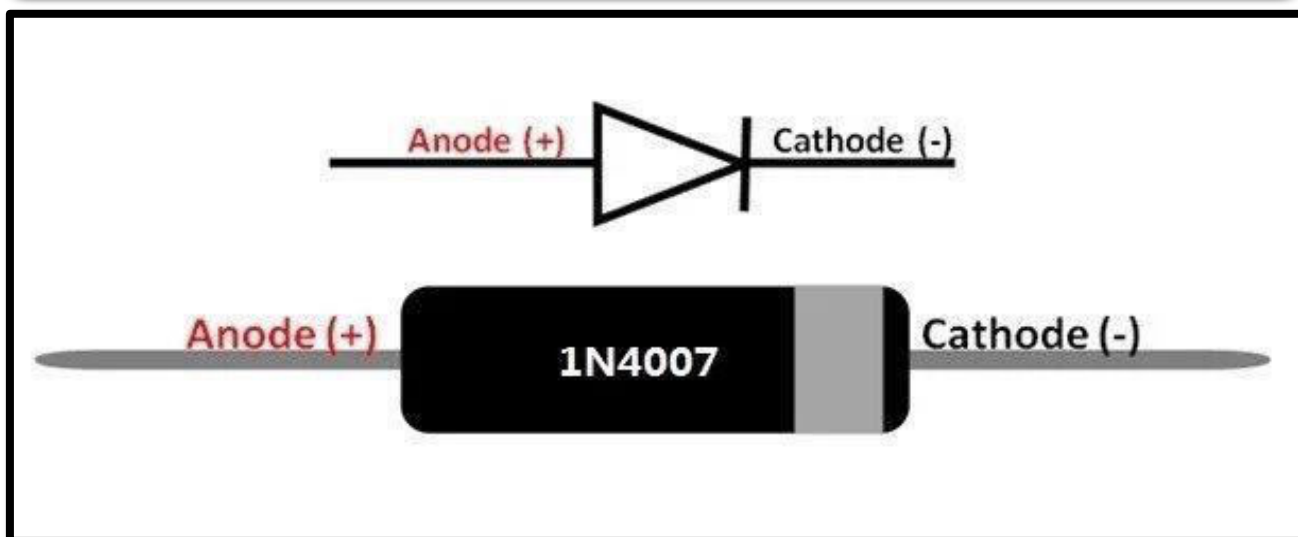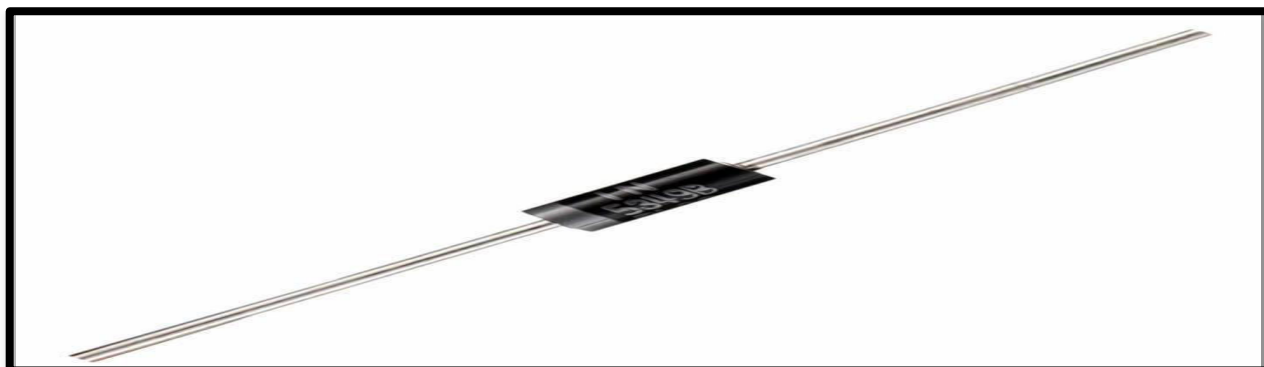

VII. TOTAL PROJECT COST ESTIMATION

SR.NO	Material	Amount
1	MOSFET IRFP 260N	200 ₹
2	ZENER DIODE 1-5W/12V	40 ₹
3	DIODE 4007	20 ₹
4	RESISTER 10 K & 470 OHM	20 ₹
5	CAPACITOR .68/275V	80 ₹
6	DC SUPPLY 12 – 40V/7-30A	800 ₹
7	TOROIDAL COIL	300 ₹
8	COPPER WIRE 2mm	300 ₹
9	COPPER WIRE 19swg	357 ₹
10	HEATSINK PLATE	300 ₹
TOTAL		2417 ₹

Overall Conclusion



International Journal of Multidisciplinary Research in Science, Engineering and Technology (IJMRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)

The induction coil melting process demonstrated superior efficiency, precision, and eco-friendliness compared to conventional methods. It is especially suitable for industries requiring high-quality molten metal, such as aerospace, automotive, and metallurgy. Despite the high initial costs, the long-term benefits in terms of energy savings, operational safety, and environmental sustainability make induction melting a preferred choice for modern applications.

VIII. CONCLUSION

Induction coil melting is a cutting-edge technology that provides a highly efficient, precise, and environmentally friendly solution for melting metals. This method has demonstrated several key advantages, including:

1. **Efficiency and Precision:** The process achieves 85-90% energy efficiency by directly inducing heat within the metal. This minimizes energy loss and ensures uniform heating, leading to faster and more consistent melting compared to traditional methods.
2. **Material Quality:** Non-contact heating eliminates contamination, preserving the metal's purity. This makes it ideal for industries like aerospace, automotive, and metallurgy, where high-quality molten metal is essential.
3. **Safety and Sustainability:** The absence of combustion reduces risks associated with harmful emissions and accidents. Additionally, induction melting significantly lowers carbon emissions, aligning with global sustainability goals.
4. **Scalability and Applications:** From small-scale jewelry production to large-scale industrial alloy manufacturing, induction melting offers versatility and adaptability for a wide range of applications.
5. **Challenges and Future Improvements:** While the initial setup costs and maintenance of cooling systems pose challenges, advancements in automation, renewable energy integration, and improved cooling technologies promise to further enhance the efficiency and cost-effectiveness of the process.

In conclusion, induction coil melting represents a revolutionary advancement in metal processing, offering long-term benefits in terms of energy savings, safety, and environmental impact. As industries continue to adopt cleaner and more efficient technologies, induction melting is poised to become a cornerstone in modern manufacturing.

REFERENCES

- 1) Induction Heating and Hardening by J. M. Dearnley and R. W. Randall (Industrial Press, 1993): This book provides comprehensive details on the principles and applications of induction heating, including metal melting.
- 2) Induction Furnace Technology by P. K. Sahoo and K. S. M. S. R. Anjaneyulu: This text focuses on the specific use of induction coils in melting metals, describing the interaction between the induction coil and the metal in a furnace.
- 3) Principles of Induction Melting by A. L. Jones, published in the Journal of Applied Physics: This article discusses the science and application of induction heating for metal melting in various industrial settings.